AECOM

2026 CCR Rule Report: Periodic Safety Factor Assessment

East Emergency Holding Pond
Laramie River Station
Wheatland, Wyoming

Basin Electric Power Cooperative
Bismarck, North Dakota

Project Number: 60788384

October 12, 2026

Delivering a better world

Quality information

Prepared by	Checked by	Verified by	Approved by
Matthew Bloecher, PE (WI) Geotechnical Engineer	Aaron Humphrey, PE (WY) Senior Geotechnical Engineer	Aaron Humphrey, PE (WY) Senior Geotechnical Engineer	Jeremy Hurshman, PG Project Manager

Revision History

Revision	Revision date	Details	Authorized	Name	Position

Distribution List

# Hard Copies	PDF Required	Association / Company Name

Prepared for:

Basin Electric Power Cooperative
1717 East Interstate Avenue
Bismarck, ND 58503

Prepared by:

AECOM
1601 Prospect Parkway, Suite 120
Fort Collins, CO 80525
aecom.com

Copyright © 2026 by AECOM

All rights reserved. No part of this copyrighted work may be reproduced, distributed, or transmitted in any form or by any means without the prior written permission of AECOM.

Table of Contents

1. Introduction 1
2. Periodic Safety Factor Assessment 1
3. Certification Statement 3

Tables

Table 1. Summary of Periodic (5-Year) Safety Factor Assessment 2

1. Introduction

This Coal Combustion Residual (CCR) Rule Report documents that the East Emergency Holding Pond at the Basin Electric Power Cooperative Laramie River Station meets the safety factor assessment requirements specified in Title 40 Code of Federal Regulations (40 CFR) § 257.73(e).

The East Emergency Holding Pond is an existing CCR surface impoundment as defined by 40 CFR § 257.53. The CCR Rule[1] requires that an initial safety factor assessments be by October 17, 2016, and no more than every five years thereafter. The previous safety factor assessment for the East Emergency Holding Pond was completed on October 12, 2021; therefore, the current 5-year update is due October 12, 2026.

The owner or operator of the CCR unit must obtain a certification from a qualified professional engineer stating that the periodic safety factor assessment meets the requirements of 40 CFR § 257.73(e).

2. Periodic Safety Factor Assessment

40 CFR § 257.73(e)(1)
The owner or operator must conduct initial and periodic safety factor assessments for each CCR unit and document whether the calculated factors of safety for each CCR unit achieve the minimum safety factors specified in (e)(1)(i) through (iv) of this section for the critical cross section of the embankment. The critical cross section is the cross section anticipated to be the most susceptible of all cross sections to structural failure based on appropriate engineering considerations, including loading conditions. The safety factor assessments must be supported by appropriate engineering calculations.

(i) The calculated static factor of safety under the long-term, maximum storage pool loading condition must equal or exceed 1.50.
(ii) The calculated static factor of safety under the maximum surcharge pool loading condition must equal or exceed 1.40.
(iii) The calculated seismic factor of safety must equal or exceed 1.00.
(iv) For dikes constructed of soils that have susceptibility to liquefaction, the calculated liquefaction factor of safety must equal or exceed 1.20.

Since the 2021 assessment, the west area of the East Emergency Holding Pond was retrofitted with a new geosynthetic liner in 2021. Additionally, the east lobe of the East Emergency Holding Pond was clean closed at the time of the retrofit and is empty of all CCR and liquids. The east lobe is adequately vegetated and not a CCR unit. As part of the periodic assessment, an updated analysis has been performed to document that the calculated factors of safety for the East Emergency Holding Pond achieve the minimum factors of safety listed in § 257.73(e)(1)(i) through (iv). The periodic safety factor assessment included evaluating multiple cross-sections of existing conditions at the time of this assessment and performing analyses at the critical (i.e. most susceptible) cross section, based on appropriate engineering considerations and calculations. The analyses used subsurface information collected from historical subsurface investigations and laboratory data. Engineering properties for the various material strata were selected based on the results of available field and laboratory data. The results of the safety factor assessment are listed in Table 1.

[1] U.S. Environmental Protection Agency. (USEPA). (2015). *Hazardous and Solid Waste Management System; Disposal of Coal Combustion Residuals From Electric Utilities; Final Rule*, 40 CFR §257. Federal Register, Volume 80, Subpart D, April 17, 2015.

Table 1. Summary of Periodic (5-Year) Safety Factor Assessment

Loading Conditions	§ 257.73(e)(1) Subsection	Minimum Factor of Safety	Calculated Factor of Safety	
			North Dike	East/South Dike
Maximum Storage Pool Loading	(i)	1.50	1.51	2.00
Maximum Surcharge Pool Loading	(ii)	1.40	1.51	2.00
Seismic	(iii)	1.00	1.16	1.42
Soils Susceptible to Liquefaction	(iv)	1.20	2.00	2.00

Based on this evaluation, the East Emergency Holding Pond meets the requirements in § 257.73(e)(1).

3. Certification Statement

CCR Unit: Basin Electric Power Cooperative; Laramie River Station; East Emergency Holding Pond

I, Aaron Humphrey, being a Registered Professional Engineer in good standing in the State of Wyoming, do hereby certify, to the best of my knowledge, information, and belief that the information contained in this CCR Rule Report has been prepared in accordance with the accepted practice of engineering. I certify, for the above referenced CCR Unit, that the periodic safety factor assessment 6 meets the requirements of 40 CFR § 257.73(e).

Aaron M Humphrey

Printed Name

October 12, 2026
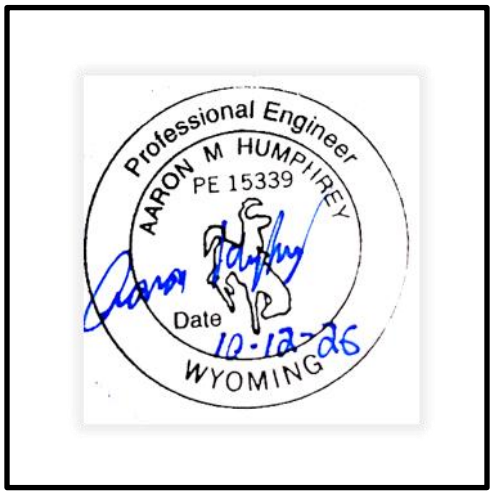
Date